


Enhanced ease of use – huge variety

Wall cabinets with lift systems ensure head clearance and make it easy to access the contents of the cabinet. Plus, AVENTOS ensures that all fronts are as light as a feather to open. What makes AVENTOS really practical is that it offers the furniture user full freedom of movement and provides the necessary head clearance at all times.



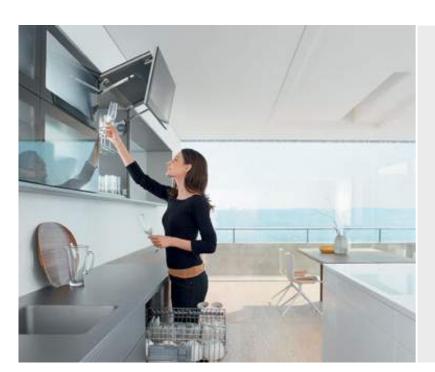

Unhindered access

With AVENTOS, the front moves up, taking it right away from the work area.

This means that the lift system can remain open while you are cooking, ensuring that the cabinet contents can be easily accessed at all times.



Holds in any position required

If the lift mechanism is precisely adjusted to the front weight, the variable stop ensures that the lift system remains in any position required and is therefore always within easy reach for closing.



Consistent wall and base cabinet design

Horizontal gaps determine the appearance and should not be interrupted by too many vertical gaps. With cabinet widths of up to 1800 mm, the design of the wall cabinet can match that of the base cabinet with AVENTOS.



Easy opening and effortless closing

With its combination of easy opening and built-in BLUMOTION, AVENTOS brings you a brand-new experience. With the SER-VO-DRIVE electrical motion support system, a light touch is all that is needed to open the lift system, which can then be closed again softly and effortlessly with a press of the wireless switch. TIP-ON allows handle-less lift systems to be opened mechanically too.




One product range – many possibilities

The entire AVENTOS lift system range is suitable for wide and narrow alu frames as well as wooden fronts. Plus, the AVENTOS HF, HS, HL and HK fittings mean that even lift systems designed with mitres or rebates can be implemented.

For further information on mitred and rebated applications, head to:

> www.blum.com/mitresrebates

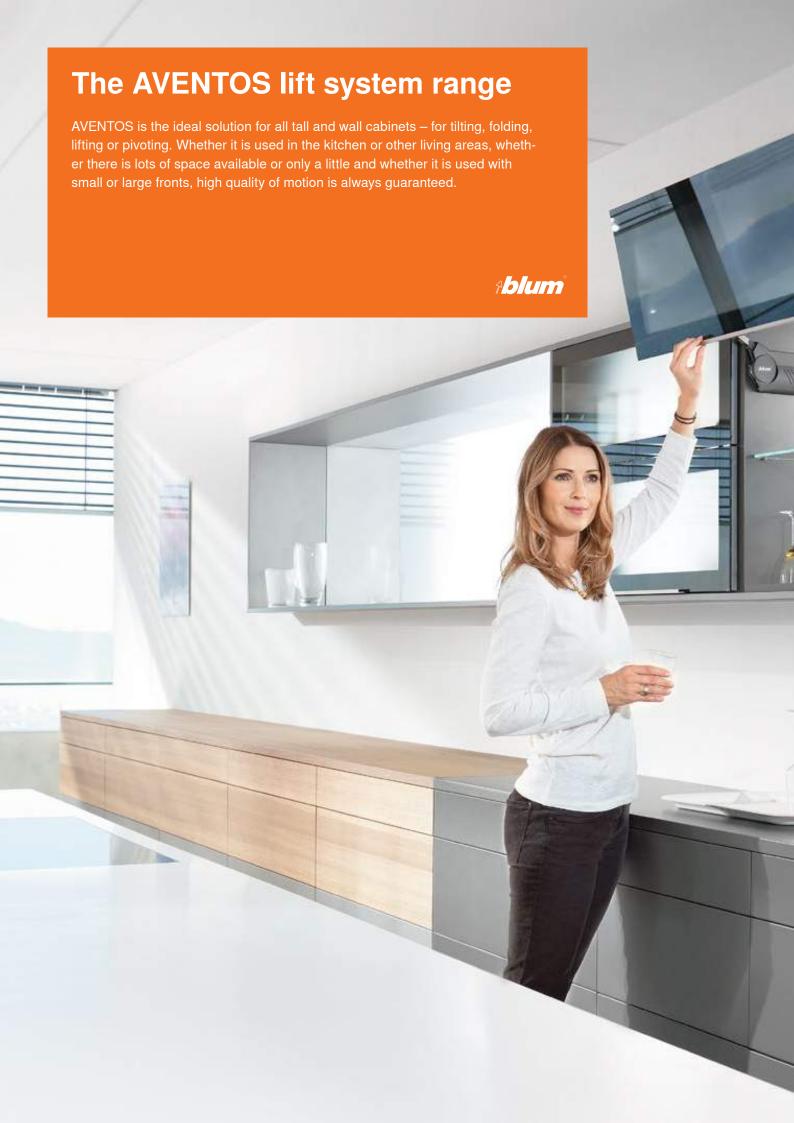





AVENTOS HF – bi-fold lift system

- For high, bi-fold fronts in wall cabinets
- Low upward space requirement
- Can be used with fronts of different heights



AVENTOS HS - up & over lift system

- For large, one-part fronts in wall cabinets
- The lift system pivots over the cabinet
- Can be combined with cornice or crown moulding



AVENTOS HL – lift up

- For small, one-part fronts in tall and wall cabinets
- Suitable for use with overlying fronts
- Conceals devices behind a continuous front



AVENTOS HK – stay lift

- For heavy fronts in wall cabinets
- Low upward space requirement
- One-part fitting and no hinges required



AVENTOS HK-S - small stay lift

- For small fronts in tall and wall cabinets
- The lift mechanism fits harmoniously into small cabinets
- One-part fitting and no hinges required



AVENTOS HK-XS - small stay lift

- For small tall and wall cabinets
- Also for cabinets with low internal depths
- Small fitting that can be used on one or two sides













	HF	HS	HL	HK	HK-S	HK-XS
Areas of application						
High wall cabinets						
Medium wall cabinets						
Low wall cabinets						
Tall cabinets						
Room planning						
Low upward space requirement						
Design						
One-part front						
Two-part front						
Can be combined with cornice or crown						
moulding						
Cabinet height dimensions in mm	480-1040	350-800	300-580	up to 6001	up to 600	up to 600
Cabinet width dimensions in mm	up to 1800 ²					
Ergonomics						
Handle within easy reach				(■)	(■)	(■)
Easy access to cabinet interior	•					
Motion technologies						
BLUMOTION						

¹ For ergonomic reasons, we recommend a maximum cabinet height of 600 mm. However, higher lift systems can also be used subject to the power factor limits.



SERVO-DRIVE TIP-ON

blum.com

Further information on our lift systems is available at:



www.blum.com/aventosoverview



Product configurator

It is easy to work out the fittings and drilling positions you need using the product configurator – just head to:



www.blum.com/configurator



ıblum

EASY ASSEMBLY-App

All information required for easy and precise assembly of Blum products is available on your mobile device at all times.



> www.blum.com/eaapp

² Depending on the power factor.

 $^{^{\}rm 3}$ Cannot be combined with BLUMOTION.



Blum India Pvt. Ltd.
Times Square building
Ground & first floor
Western Express Highway
Next to Natraj building
Andheri East
Mumbai 400 069
Maharashtra
India

Tel.: +91 22 4610 7000 Fax: +91 22 4610 7099 E-mail: info.in@blum.com

www.blum.com

Hafele India Pvt. Ltd.
Office No. 3, Building "A", BETA
I Think Techno Campus
Off J.V.L.R, Opp Kanjurmarg Station
Kanjurmarg East, Mumbai 400 042
India

Customer Care (toll free)
Tel.: 1800 266 6667
Tel.: +91 22 6142 6100
Fax: +91 22 6695 0922
E-mail: info@hafeleindia.com

Julius Blum GmbH Furniture Fittings Mfg. 6973 Höchst, Austria Tel.: +43 5578 705-0 Fax: +43 5578 705-44 E-mail: info@blum.com

www.blum.com







