

# AVENTOS HK-S

Minimalistic: the new cover caps

[www.blum.com](http://www.blum.com)

 blum®

## Memo

i

Available in three colours



Light grey



Silk white



Dark grey



AVENTOS HK top with dark grey cover cap

AVENTOS HK-S, the stay lift for small fronts, has been given a new look. The cover caps have been redesigned giving them a minimalistic sleek finish that complements the design of the AVENTOS HK top. The new cover caps are available in three colours: light grey, silk white and dark grey. The small stay lift fits stylishly into cabinets of varying designs and offers the very highest quality of motion.

The new design makes it easy to combine the AVENTOS HK-S with the new AVENTOS HK top stay lift in any living area to create a uniform and clear overall impression from small and large cabinets with stay lifts throughout the living space.

# AVENTOS HK-S



## The new cover caps


### Order specification



#### Power factor (LF)

Power factor (LF) = cabinet height (KH) [mm] x front weight incl. double handle weight [kg]

We recommend the more powerful lift mechanism for overlapping areas.

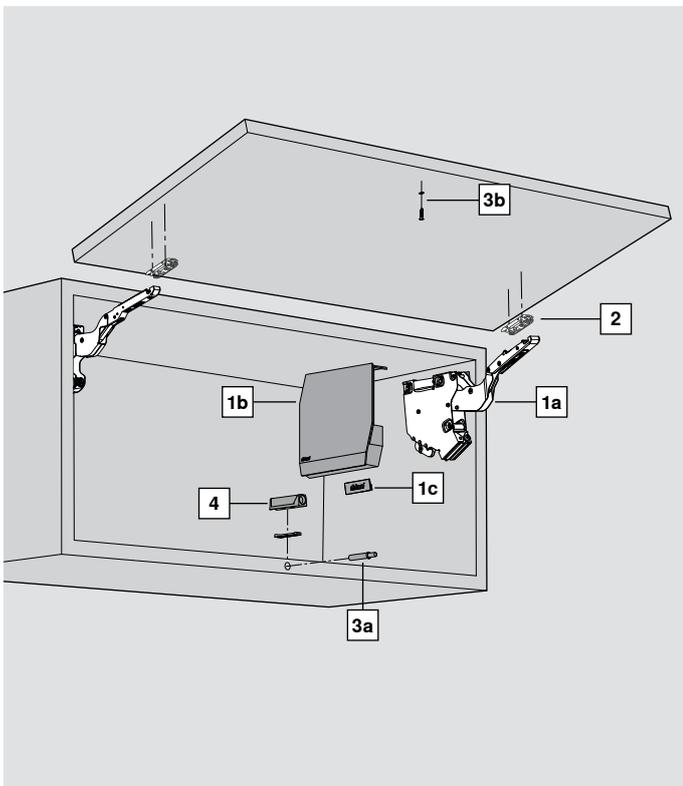

2		Front fixing bracket	
	Fixing method	Spacing (mm)	
	Screw-on version	0 **	175H3100
	EXPANDO	0	177H3100E
	Knock-in version	0	177H3100
<b>Wooden fronts and wide alu frames</b>			2 x

Horizontal steel mounting plates with 0 mm spacing should be used.

\*\* Use 2 chipboard screws (609.1x00) per side for wooden fronts.  
Use 2 counter sunk self-tapping screws (660.0950) per side for wide alu frames.

Front fixing bracket set	
Narrow alu frames	1 x 20K4A00A02

3		TIP-ON set	
	For drilling Ø 10 x 50 mm		
	SW, TS, R7036		
	Short version		956.1004
Up to cabinet height (KH) 600 mm			

#### Consisting of:

- 3a | 1 x TIP-ON
- 3b | 1 x Screw-on catch plate  
1 x Chipboard screw 609.1500  
1 x Comment: glue-on catch plate (alternative to screw-on version)

1		Lift mechanism set			
	HGR, SW, TGR				
	LF	OW	Standard	TIP-ON	
	220-500	107° *	20K2B00.06	20K2B00T06	
	400-1000	107°	20K2C00.06	20K2C00T06	
960-2215	107°	20K2E00.06	20K2E00T06		

#### Consisting of:

- 1a | 2 x Symmetrical lift mechanism
- 1b | 2 x Cover caps left/right
- 1c | 2 x Small cover cap, stamped with Blum logo  
6 x Chipboard screw Ø 4 x 35 mm

#### Note

The power factor (LF) can be increased by 50% when using a third lift mechanism

\* 1 lift mechanism is unsprung

4		Straight adapter plate	
	Plastic, screws***		
	SW, TS, R7036, NI-L		
	Short version		956.1201

Alternative to straight adapter plate

Cruciform adapter plate	
Plastic, screws***	
R7036	
Long version	956A1501

\*\*\* Assemble using Ø 3.5 mm or Ø 4 mm chipboard screws.

#### Accessories

Opening angle stop	
Plastic	
100°, dark grey	2 x 20K7A41
75°, dust grey	2 x 20K7A11

□ Standard  
■ TIP-ON

LF Power factor  
OW Opening angle

HGR= light grey, SW= silk white, TGR= dark grey, TS= terra black, R7036= RAL 7036 platinum grey, NI-L= nickel-lacquered